

## Applications

Medium duty suction and transportation of beverages and food stuff.

## Properties:

Flexible PVC hose, reinforced with a shock resistant rigid PVC spiral.

Manufactured from material that is approved for contact with food according to European standard Bore smooth, exterior sinuous

## Standard Colors:

Transparent with a White spiral

## Materials:

DOP Free  
RoHS, Reach Standard  
UV- protections added


## Temperatures Range:

-15°C < Temp < 60°C

## Standard:

Tolerance: ISO 1307  
EC food contact (EU)  
10/2011 ,/ 174/2015

Code	Internal Diameter		Weight gr / m	Work Pressure Bar / 20°C	Vacuum MH <sub>2</sub> O	Bending Radius mm	Roll Length m
	mm	Inch					
NX-100	25	1"	300	6.5	7	105	50
NX-125	32	1 ¼"	370	6.5	7	132	50
NX-150	38	1 ½"	500	6.5	7	155	50
NX-140	40		530	5.5	7	157	50
NX-200	51	2"	700	5	7	205	50
NX-260	60		950	4	7	250	50
NX-250	63	2-1/2"	980	4	7	260	50
NX-270	70		1000	4	7	295	50
NX-300	76	3"	1400	4	6	342	50
NX-350	89	3-1/2"	1800	3	6	390	30
NX-400	102	4"	2000	3	6	430	30

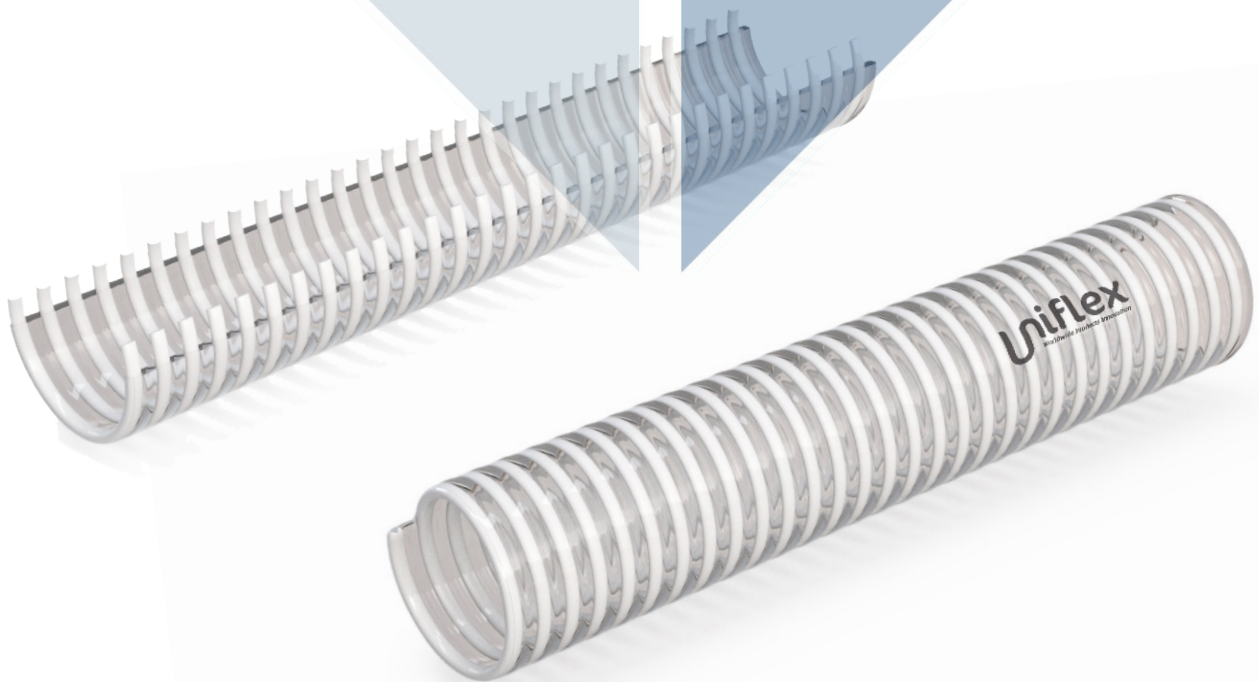

sizes are available upon request.